CAMPING
& OUTDOORS

WAECO
by Dometic GROUP

INSPIRED BY COMFORT

CONTENTS

WAECO *CFX* & CoolFreeze compressor fridge/freezers	3 - 11
WAECO *CFX* & CoolFreeze accessories including WAECO Portable solar panels	12 - 15
WAECO Cool-Ice iceboxes	16
WAECO CoolFun, BordBar & CoolPro thermoelectric coolers	17 - 19
WAECO CoolFun & Dometic 3-way absorption coolers	20 - 21
WAECO power solutions	22 - 23
Dometic portable toilets & additives	24 - 25
WAECO vacuum cleaner and kettle	26
Dometic Vacuum sealer, Origo cooking & Truma LevelCheck	27
Milenco mirrors, levels & gauges	28 - 29
WAECO spare parts	30

Contents, specifications and availability are subject to change due to technical improvement. Dometic GROUP accepts no liability for errors and printing mistakes.

WAECO CoolFreeze CF

COMPACT FRIDGE/FREEZERS

WAECO CoolFreeze CF-18

Compressor fridge/freezer for refrigeration or deep-freezing.

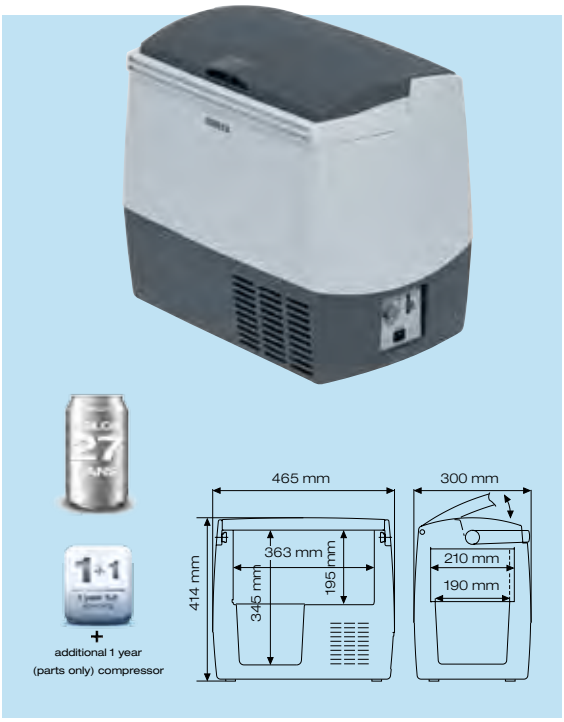

Gross capacity	18 litres
Voltage	12/24 volts DC
Power input	Approx. 35 watts
Average running time	10% at +20 °C ambient temperature 18% at +32 °C ambient temperature both at +5 °C interior temperature
Power consumption	Power input x average running time.
Temperature range	+10 °C to -18 °C, continuously variable via electronic thermostat
Insulation	CFC-free PU foam
System	Compressor with low-voltage protection adjustable for leisure or starter battery by means of a slide switch, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Material	Cabinet: PP; lid: PE
Colour	Body: pale grey/dark grey; lid: dark grey
Weight	approx. 11.5 kg
Quality features	Detachable fold-up lid, sturdy carrying handle, vertical space for standing 2 litre bottles
Scope of delivery	DC connection cable, folding shelf
Test marks	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)

Product	Ref. No.
CoolFreeze CF-18	CF-18

WAECO CoolFreeze CF-25

Compressor fridge/freezer for refrigeration or deep-freezing.

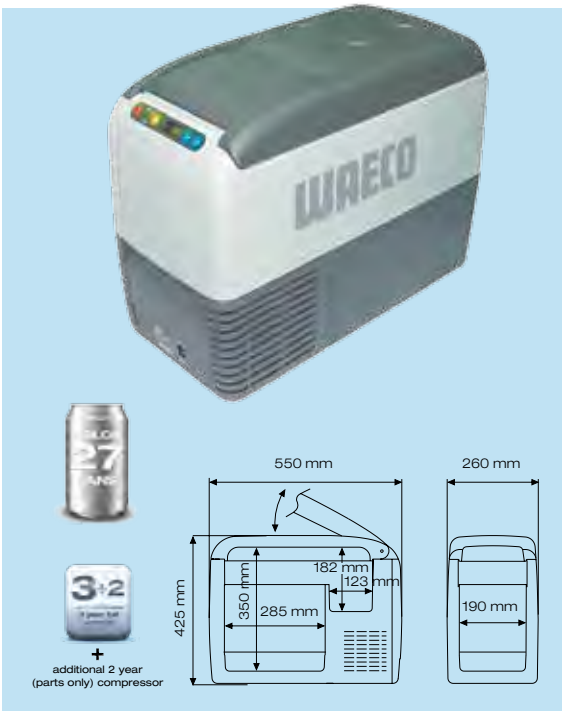

Gross capacity	23 litres
Voltage	12/24 volts DC
Power input	Approx. 35 watts
Average running time	15% at +20 °C ambient temperature 19% at +32 °C ambient temperature both at +5 °C interior temperature
Power consumption	Power input x average running time.
Temperature range	+10 °C to -18 °C, continuously variable via electronic thermostat
Insulation	CFC-free PU foam
System	Secop (formerly Danfoss) compressor with low-voltage protection adjustable for leisure or starter battery, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Material	Cabinet: PP; lid: PE
Colour	Body: pale grey/dark grey; lid: dark grey
Weight	12.5 kg
Quality features	Detachable lid (lid mount at the front), vertical space for standing 2 litre bottles, interior light
Scope of delivery	DC connection cable, removable wire basket

Product	Ref. No.
CoolFreeze CF-25	CF-25VERA

WAECO *CFX* Fridge/freezers

THE NEXT GENERATION PORTABLE FRIDGE

GO ANYWHERE!

RUGGED FEATURES, INNOVATIVE TECHNOLOGY AND EXTREMELY POWERFUL, YET EFFICIENT COOLING…

The new **WAECO *CFX*** fridge/freezer range is the result of many years of research and product development. We have taken your feedback into account to develop a fridge that is tough enough to endure the harshest Australian environments. We know if it will perform there, it will perform anywhere and in any situation.

Purpose built for Australian conditions

WAECO *CFX* provides extreme cooling performance and energy efficiency. All five models have generous internal capacities, combined with substantial insulation thickness all round - lid, sides and bottom. They are equipped with rugged features like strong latches, hinges, drop down handles, and innovative technology such as the new genuine WAECO compressor and upgraded VMSO (Variable Motor Speed Optimisation).

So whether you use it for 4WDriving, camping, fishing, for extended holidays enjoying this vast country, or just for a day trip or for the daily chores – with **WAECO *CFX***, you can go anywhere!

- Genuine WAECO compressor with integrated AC electronics
- Up to 50 °C below ambient temperature
- Suitable for solar operation
- 12/24 volts DC and 240 volts AC
- Suitable for vehicles with a single battery

WAECO *CFX-35*

Compressor fridge/freezer for refrigeration or deep-freezing with ***CFX*** VMSO2 electronics.

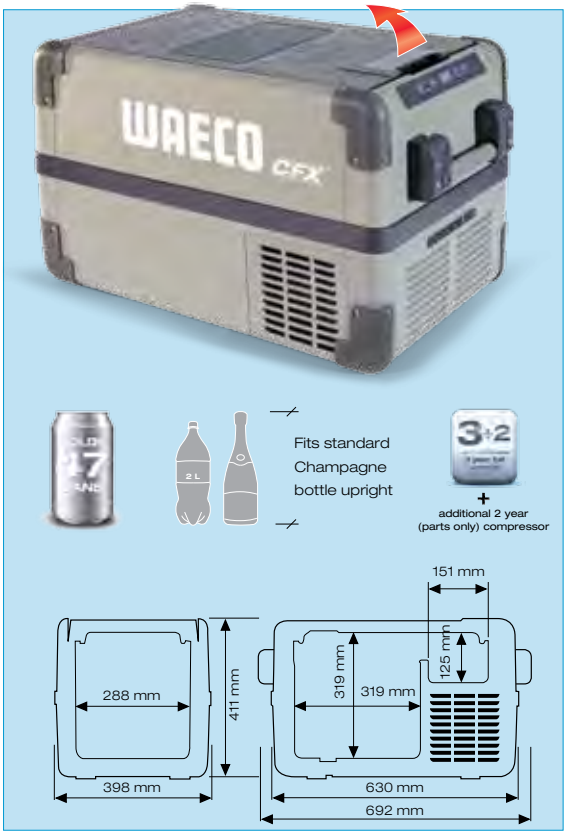

Gross capacity	34.5 litres
Voltage	12/24 volts DC and 100 – 240 volts AC
Power input (AC 230 V)	Approx. 54 watts (@ 230 V AC, 5 °C interior, 32 °C ambient)
USB charging outlet	5 V / 500 mA rating
Power consumption (DC 12 V)	Average current draw x running time. Average 0.77 Ah/h (@12 V, 5 °C interior, 32 °C ambient temperature)
Temperature range	+10 °C to -22 °C (Although capable of -22 °C due to energy efficient design, minimum setting of -18 °C recommended for normal usage)
Insulation	CFC-free PU foam, substantial thickness on lid, bottom & sides
System	Fully hermetic WAECO ACV20DC compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Material	Cabinet & lid: Polypropylene, Handle ends: Glass filled nylon, Handle rod: powder coated steel, Hinges: Die cast stainless steel. All screws are stainless steel
Colour	Body: pale grey/dark grey; lid: dark grey
Weight	17.5 kg
Quality features	Detachable lid, interior light. ***CFX*** VMSO2 electronics with soft start and turbo cooler, USB port, 4 point M6 nutserts in base
Scope of delivery	DC and AC connection cables, removable wire basket, spring-loaded carrying handles

Product	Ref. No.
WAECO CFX-35	CFX-35

WAECO *CFX-40*

Compressor fridge/freezer for refrigeration or deep-freezing with ***CFX*** VMSO2 electronics.

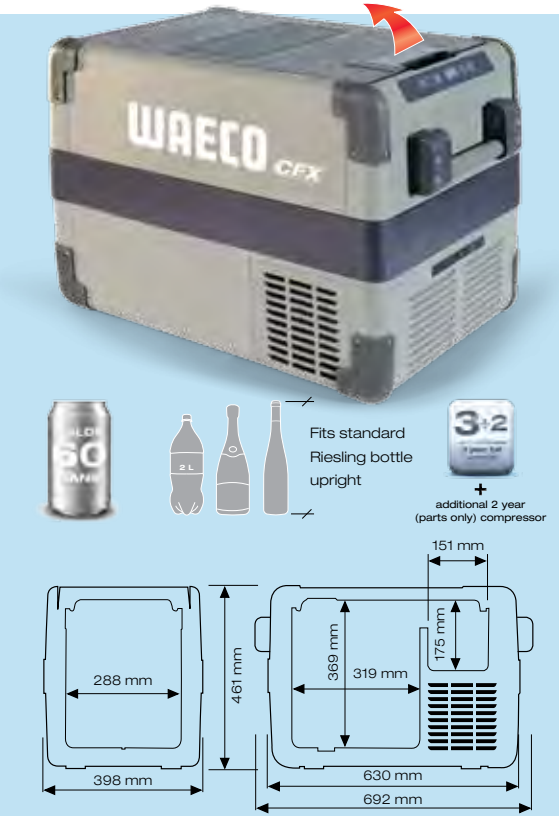

Gross capacity	41 litres
Voltage	12/24 volts DC and 100 – 240 volts AC
Power input (AC 230 V)	Approx. 56 watts (@ 230 V AC, 5 °C interior, 32 °C ambient)
USB charging outlet	5 V / 500 mA rating
Power consumption (DC 12 V)	Average current draw x running time. Average 0.74 Ah/h (@12 V, 5 °C interior, 32 °C ambient temperature)
Temperature range	+10 °C to -22 °C (Although capable of -22 °C due to energy efficient design, minimum setting of -18 °C recommended for normal usage)
Insulation	CFC-free PU foam, substantial thickness on lid, bottom & sides
System	Fully hermetic WAECO ACV20DC compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Material	Cabinet & lid: Polypropylene, Handle ends: Glass filled nylon, Handle rod: powder coated steel, Hinges: Die cast stainless steel. All screws are stainless steel
Colour	Body: pale grey/dark grey; lid: dark grey
Weight	18.5 kg
Quality features	Detachable lid, interior light. ***CFX*** VMSO2 electronics with soft start and turbo cooler, USB port, 4 point M6 nutserts in base
Scope of delivery	DC and AC connection cables, removable wire basket, spring-loaded carrying handles

Product	Ref. No.
WAECO CFX-40	CFX-40

Contents, specifications and availability are subject to change due to technical improvement. Dometic GROUP accepts no liability for errors and printing mistakes.

WAECO *CFX-50*

Compressor fridge/freezer for refrigeration or deep-freezing with ***CFX*** VMSO2 electronics.

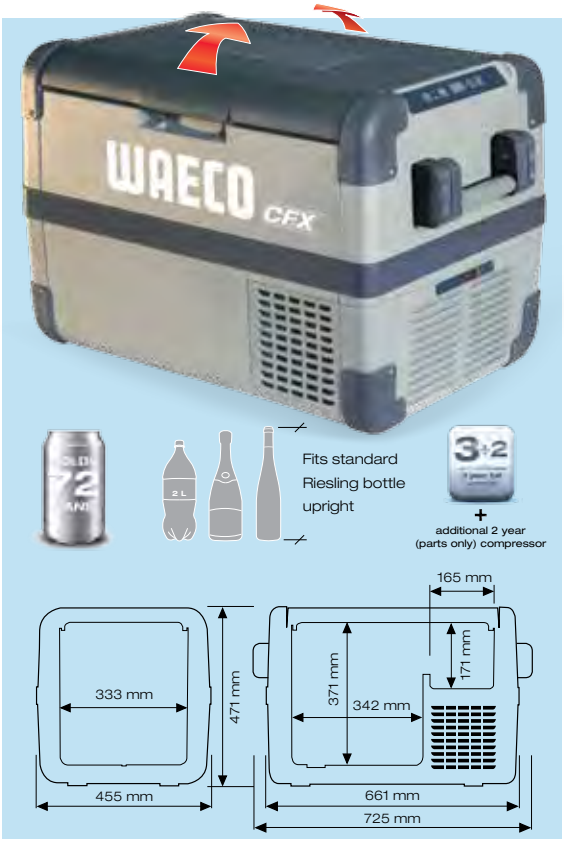

Gross capacity	50 litres
Voltage	12/24 volts DC and 100 – 240 volts AC
Power input (AC 230 V)	Approx. 60 watts (@ 230 V AC, 5 °C interior, 32 °C ambient)
USB charging outlet	5 V / 500 mA rating
Power consumption (DC 12 V)	Average current draw x running time. Average 0.77 Ah/h (@12 V, 5 °C interior, 32 °C ambient temperature)
Temperature range	+10 °C to -22 °C (Although capable of -22 °C due to energy efficient design, minimum setting of -18 °C recommended for normal usage)
Insulation	CFC-free PU foam, substantial thickness on lid, bottom & sides
System	Fully hermetic WAECO ACV20DC compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Material	Cabinet & lid: Polypropylene, Handle ends: Glass filled nylon, Handle rod: powder coated steel, Hinges: Die cast stainless steel. All screws are stainless steel
Colour	Body: pale grey/dark grey; lid: dark grey
Weight	20.4 kg
Quality features	Detachable lid, interior light. ***CFX*** VMSO2 electronics with soft start and turbo cooler, USB port, 4 point M6 nutserts in base
Scope of delivery	DC and AC connection cables, removable wire basket, spring-loaded carrying handles

Product	Ref. No.
WAECO CFX-50	CFX-50

WAECO *CFX-65*

Compressor fridge/freezer for refrigeration or deep-freezing with ***CFX*** VMSO2 electronics.

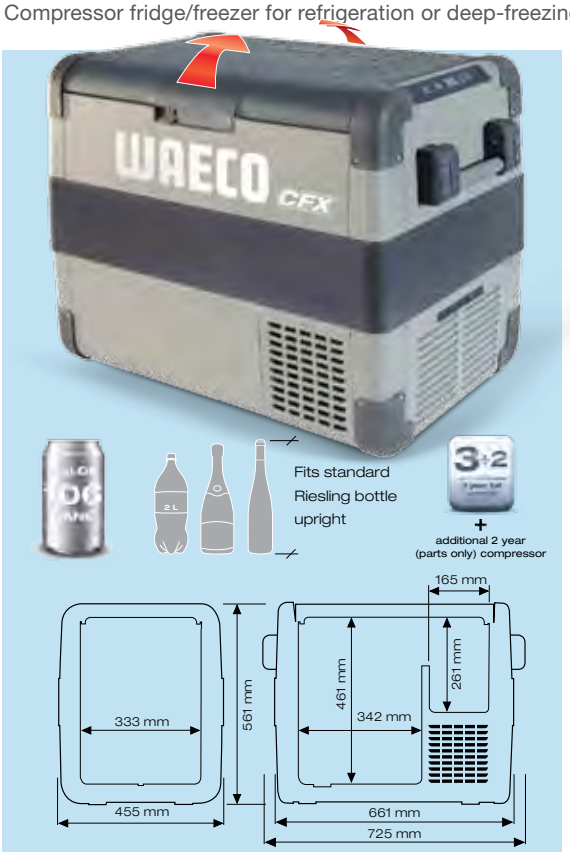

Gross capacity	65 litres
Voltage	12/24 volts DC and 100 – 240 volts AC
Power input (AC 230 V)	Approx. 65 watts (@ 230 V AC, 5 °C interior, 32 °C ambient)
USB charging outlet	5 V / 500 mA rating
Power consumption (DC 12 V)	Average current draw x running time. Average 0.85 Ah/h (@12 V, 5 °C interior, 32 °C ambient temperature)
Temperature range	+10 °C to -22 °C (Although capable of -22 °C due to energy efficient design, minimum setting of -18 °C recommended for normal usage)
Insulation	CFC-free PU foam, substantial thickness on lid, bottom & sides
System	Fully hermetic WAECO ACV20DC compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Material	Cabinet & lid: Polypropylene, Handle ends: Glass filled nylon, Handle rod: powder coated steel, Hinges: Die cast stainless steel. All screws are stainless steel
Colour	Body: pale grey/dark grey; lid: dark grey
Weight	22.3 kg
Quality features	Detachable lid, interior light. ***CFX*** VMSO2 electronics with soft start and turbo cooler, USB port, 4 point M6 nutserts in base
Scope of delivery	DC and AC connection cables, removable wire basket, spring-loaded carrying handles

Product	Ref. No.
WAECO CFX-65	CFX-65

Genuine WAECO compressor with integrated AC electronics

Up to 50 °C below ambient temperature

Suitable for solar operation

12/24 volts DC and 240 volts AC

Suitable for vehicles with a single battery

WAECO *CFX-65DZ*

Compressor dual zone fridge and freezer plus dairy with ***CFX*** VMSO2 electronics.

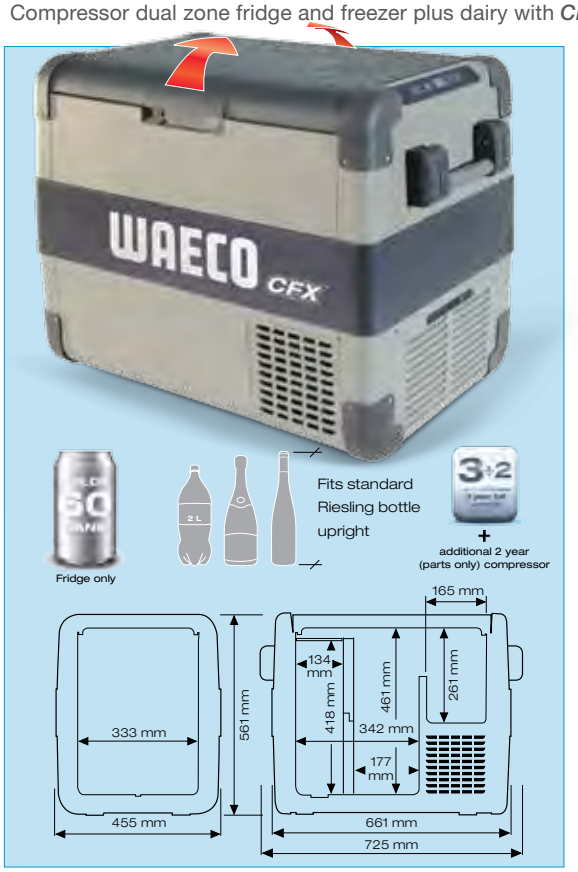

Gross capacity	61 litres TOTAL - **Fridge:** 42 litres, **Freezer:** 19 litres
Voltage	12/24 volts DC and 100 – 240 volts AC
Power input (AC 230 V)	Approx. 50 watts (@ 230 V AC, -15 °C freezer, 32 °C ambient)
USB charging outlet	5 V / 500 mA rating
Power consumption (DC 12 V)	Average current draw x running time. Average 1.9 Ah/h (@12 V, -15 °C freezer, 32 °C ambient temperature)
Temperature range	+10 °C to -22 °C (Although capable of -22 °C due to energy efficient design, minimum setting of -18 °C recommended for normal usage)
Insulation	CFC-free PU foam, substantial thickness on lid, bottom & sides
System	Fully hermetic WAECO ACV20DC compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Material	Cabinet & lid: Polypropylene, Handle ends: Glass filled nylon, Handle rod: powder coated steel, Hinges: Die cast stainless steel. All screws are stainless steel
Colour	Body: pale grey/dark grey; lid: dark grey
Weight	23.2 kg
Quality features	Detachable lid, interior light. ***CFX*** VMSO2 electronics with soft start and turbo cooler, USB port, 4 point M6 nutserts in base
Scope of delivery	DC and AC connection cables, two removable wire baskets, fridge/freezer divider, freezer lid, spring-loaded carrying handles

Product	Ref. No.
WAECO CFX-65DZ	CFX-65DZ

GENUINE WAECO COMPRESSOR

WITH INTEGRATED AC ELECTRONICS

The genuine WAECO compressor is a result of a significant R&D investment. It has been designed with input from Dometic-WAECO engineers in order to fulfil performance requirements based on Australian climate, usage and road conditions. The WAECO electronics via VMSO2 are matched to support the extreme (-22 °C) capability and also contribute to the power efficiency of the WAECO CFX.

VMSO Mk2

VARIABLE **M**OTOR **S**PEED **O**PTIMISATION PROVIDES FAST AND EFFICIENT COOLING OR FREEZING

The unique VMSO Mk2 technology in the WAECO *CFX* range ensures optimal compressor speed according to the set temperature. Building on VMSO first deployed in the WAECO CF range, the upgraded VMSO Mk2 provides an even softer start for the compressor, and takes the compressor turbo speed to higher RPM than before until set temperature is reached, after which the speed drops back to economy mode. For very cold freezer set temperatures, the compressor remains at turbo speed after the soft start. This technology is extremely effective in all weather conditions, especially when hot. Benefits include even faster and more energy efficient cooling with reduced wear and tear on the compressor.

Contents, specifications and availability are subject to change due to technical improvement. Dometic GROUP accepts no liability for errors and printing mistakes.

WAECO CoolFreeze CF

LARGE CAPACITY FRIDGE/FREEZERS

By popular demand, a single zone CF-80 model has been added to the CF range.
Whilst the CF-80DZ dual zone configuration model is still available, you can now choose from the single fridge or freezer model, or dual zone model that cools and freezes at the same time.

WAECO CoolFreeze CF-80

Compressor fridge/freezer for refrigeration or deep freezing with CF VMSO electronics

Product	Ref. No.
WAECO CF-80 Single zone	CF-80ACVERB1

Gross capacity	80 litres
Voltage	12/24 volts DC and 100 – 240 volts AC
Power input (AC 230 V)	Approx. 65 watts
Power consumption (DC 12 V)	Average current draw x running time. Average 2.0 Ah/h (@12 V, 5 °C interior, 32 °C ambient temp)
Temperature range	+10 °C to -18 °C, free temp setting via elec thermostat with digital temp readout
Insulation	CFC-free PU foam
System	Secop (formerly Danfoss) compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated fin condenser, aluminium rollbond evaporator
Material	Cabinet: coated sheet steel, top and base: PP, lid: PE
Colour	Body: pale grey/dark grey, lid: pale grey
Weight	29 kg
Quality features	Detachable lid (screw-on lid mount, variable left/right), sturdy latches and hinges, interior light, vertical space for 2 litre bottles. CF special electronics with soft start and turbo cooler
Scope of delivery	DC and AC connection cables, removable wire basket, detachable carrying handles

WAECO CoolFreeze CF-80DZ

Compressor dual zone fridge and freezer plus dairy with CF VMSO electronics

Product	Ref. No.
WAECO CF-80 Dual zone	CF-80ACDZVERB*

Gross capacity	76.2 litres TOTAL - **Fridge:** 50.3 litres, **Freezer:** 25.9 litres
Voltage	12/24 volts DC and 100 – 240 volts AC
Power input (AC 230 V)	Approx. 65 watts
Average running time	12% at +20 °C ambient temperature 22% at +32 °C ambient temperature both at +5 °C interior temperature
Power consumption (DC 12 V)	Average current draw x running time. Average 2.9 Ah/h (@12 V, 5 °C fridge, -15 °C (approx.) freezer 32 °C ambient temp)
Temperature range	+10 °C to -18 °C, free temp setting via elec thermostat with digital temp readout
Insulation	CFC-free PU foam
System	Secop (formerly Danfoss) compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated fin condenser, aluminium rollbond evaporator
Material	Cabinet: coated sheet steel, top and base: PP, lid: PE
Colour	Body: pale grey/dark grey, lid: pale grey
Weight	29 kg
Quality features	Detachable lid (screw-on lid mount, variable left/right), sturdy latches and hinges, interior light, vertical space for 2 litre bottles. CF special electronics with soft start and turbo cooler
Scope of delivery	DC and AC connection cables, two removable wire baskets, detachable carrying handles

* Identical to former CF-80 AC VERB

Contents, specifications and availability are subject to change due to technical improvement. Dometic GROUP accepts no liability for errors and printing mistakes.

WAECO CoolFreeze CF-110

Compressor fridge/freezer for refrigeration or deep-freezing with CF VMSO electronics.

Dimensions:
W790 x **H**555 x **D**500 mm
(**W**940 incl. handles)

3+2
\+
additional 2 year
(parts only) compressor

Product	Ref. No.
CoolFreeze CF-110	CF-110AC VERB

Gross capacity	106 litres
Voltage	12/24 volts DC and 100 – 240 volts AC
Power input (AC 230 V)	Approx. 65 watts
Average running time	14% at +20 °C ambient temperature 25% at +32 °C ambient temperature both at +5 °C interior temperature
Power consumption (DC 12 V)	Average current draw x running time. Average 2.1 Ah/h (@12 V, 5 °C interior, 32 °C ambient temp)
Temperature range	+10 °C to -18 °C, free temp setting via elec thermostat with digital temp readout
Insulation	CFC-free PU foam
System	Secop (formerly Danfoss) compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated fin condenser, aluminium rollbond evaporator
Material	Cabinet: coated sheet steel, top and base: PP, lid: PE
Colour	Body: pale grey/dark grey, lid: pale grey
Weight	32 kg
Quality features	Detachable lid (screw-on lid mount, variable left/right), sturdy latches and hinges, interior light, vertical space for 2-litre bottles. CF special electronics with soft start and turbo cooler
Scope of delivery	DC and AC connection cables, removable wire basket, detachable carrying handles

POWERFUL & DURABLE

EVEN AT EXTREME TEMPERATURES

The WAECO CoolFreeze CF-80, CF-80DZ and CF-110 models are designed for Australian conditions, delivering high performance cooling or freezing even in blistering heat, whilst keeping its cool even in areas with high fluctuating temperatures. These models owe their efficiency to the integrated AC and VMSO technology, which is unique to WAECO.

- **Lockable digital control thermostat "Set & Forget"** - Smart electronics do the work for you.
- **Built-in battery protection** - No flat batteries.
- **No dual battery required** - Suitable for vehicles with a single battery.
- **Built-in 240 volt** - No external adapter needed.
- **VMSO** (Variable Motor Speed Optimisation) - Faster cooling / Efficiently maintains the temperature / Less wear and tear.
- **Flush mounted evaporator plate** - Easy to clean.
- **Interior LED light** - Shuts off when the lid is closed.
- **Reinforced wire basket with divider** - Easy to stack and protects the evaporator plate.

COMPRESSOR TECHNOLOGY

Compressor cooling appliances work with a CFC-free refrigerant that changes from liquid to gas as it flows through the evaporator. In the process the evaporator extracts heat from the refrigeration compartment – it's getting cold. The compressor draws in the gaseous refrigerant, compresses it and passes it on to the condenser. Here, the absorbed heat is released to the atmosphere. The refrigerant changes to the original liquid state and flows back to the evaporator, where the cycle starts again.

- Excellent cooling performance even at extreme outside temperatures.
- Refrigeration and deep-freezing.
- Minimal power consumption.
- Ideal for solar operation.



Up to 50 °C below ambient temperature

Suitable for solar operation

12/24 volts DC and 240 volts AC

WAECO CoolFreeze CDF

ENTRY LEVEL FRIDGE/FREEZERS

WAECO CoolFreeze CDF-11

Portable compressor fridge/freezer for refrigeration or freezing.

- Extremely compact design
- Two integrated drink holders
- Securely fastened in a vehicle using the vehicle's own seat belts

+ additional 1 year (parts only) compressor

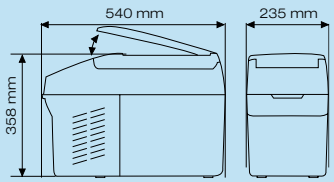

Gross capacity	10.5 litres
Voltage	12/24 volts DC
Power input	Approx. 30 watts
Temperature range	+10 °C to -18 °C, cont. variable via electronic thermostat
Insulation	CFC-free polyurethane foam
System	Compressor with integrated control electronics, low voltage protection (can be adjusted), electronic fuse/automatic reverse pole protection
Material	Housing and lid PP
Colour	Pale grey/dark grey
Weight	8.8 kg
Quality features	Electronic thermostat with digital temperature display, 3-stage battery monitor, LED interior light, adjustable shoulder strap, two drink holders, easy and secure fastening with the vehicle safety belt
Scope of delivery	DC connection cable, carry strap

Up to 50 °C below ambient temperature

Suitable for solar operation

Product	Ref. No.
CoolFreeze CDF-11	CDF-11

WAECO CoolFreeze CDF-35 pack

Portable compressor fridge/freezer for refrigeration or freezing.

+ additional 1 year (parts only) compressor

Mains adapter 240 → 12 volts
EPS-817

Insulated protective cover
CB-CDF35

Gross capacity	31 litres
Power source	12/24 volts DC + 240 volts AC (AC Adapter included)
Weight	15 kg
Dimensions	**W**340 x **H**380 x **D**560 mm
Temperature range	+5 °C to -15 °C
Scope of delivery	DC connection cable

INCLUDES: EPS-817 adapter and CB-CDF35 insulated protective cover

GREAT PACKAGE DEAL

Up to 45 °C below ambient temperature

Suitable for solar operation

Product	Ref. No.
CoolFreeze CDF35	CDF35 PACK

Contents, specifications and availability are subject to change due to technical improvement. Dometic GROUP accepts no liability for errors and printing mistakes.

WAECO CoolFreeze CF40 PACK

Portable compressor fridge/freezer for refrigeration or freezing.

Gross capacity	37 litres
Voltage	12/24 volts DC
Power input (AC 230 V)	approx. 45 watts
Power consumption (DC 12 V)	Power input x average running time. Average 0.87amps/hr (@12 V, 5°C interior, 32°C ambient temperature)
Temperature range	+10°C to –18°C, free temperature setting via electronic thermostat with digital temperature readout
Insulation	CFC-free PU foam
System	Secop (formerly Danfoss) compressor with integrated control electronics, low voltage protection adjustable for leisure and starter batteryvia electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Material	Cabinet: PP, lid: PE
Colour	Body: pale grey; lid: dark grey
Weight	17 kg
Dimensions	**W**360 x **H**445 x **D**580 mm
Quality features	Detachable lid (lid mount at the front), interior light, vertical space for standing 1.5-litre bottles.
Scope of delivery	DC and AC connection cables, removable wire basket, detachable carrying handles

Product	Ref. No.
CoolFreeze CF40 Pack	CF40 Pack

WAECO CoolFreeze CF50 PACK

Portable compressor fridge/freezer for refrigeration or freezing.

Gross capacity	49 litres
Voltage	12/24 volts DC
Power input (AC 230 V)	approx. 45 watts
Power consumption (DC 12 V)	Power input x average running time. Average 0.87amps/hr (@12 V, 5°C interior, 32°C ambient temperature)
Temperature range	+10°C to –18°C, free temperature setting via electronic thermostat with digital temperature readout
Insulation	CFC-free PU foam
System	Secop (formerly Danfoss) compressor with integrated control electronics, low voltage protection adjustable for leisure and starter batteryvia electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Material	Cabinet: PP, lid: PE
Colour	Body: pale grey; lid: dark grey
Weight	19 kg
Dimensions	**W**630 x **H**480 x **D**360 mm
Quality features	Detachable lid (lid mount at the front), interior light, vertical space for standing 1.5-litre bottles.
Scope of delivery	DC and AC connection cables, removable wire basket, detachable carrying handles

Product	Ref. No.
CoolFreeze CF50 Pack	CF50 Pack

WAECO ACCESSORIES

Does the need for outdoor adventure take you over rough terrain at times? Go ahead, as the insulated protective cover allows your fridge/freezer to take on any challenge. The cover protects from moisture, dust and dirt. It also provides effective insulation, improving the cooling capacity and therefore the energy consumption even further.

WAECO *CFX* Insulated protective covers

For ***CFX-35***, ***CFX-40***, ***CFX-50***, ***CFX-65*** & ***CFX-65DZ***

Suits ***CFX-35***

Suits ***CFX-40***

Suits ***CFX-50***

Suits ***CFX-65 & CFX-65DZ***

Protects against heat	Extra insulation against strong sunshine or extreme outside temperatures Saves battery power, improves overall efficiency
Protects against excessive movement	Eyelets for securing your fridge firmly in a vehicle
Practical features	Top flap split to suit reversible lid opening on ***CFX-50***, ***CFX-65*** & ***CFX-65DZ***. Top flap swings open with lid on ***CFX-35*** & ***CFX-40*** Open panels for handles and connection plugs Protects against dirt, dust & sand. Keeps your fridge like new in harsh Australian conditions Protects against moisture and water splashes For use on yachts, boats or open vehicles
Materials	Sides and top made from high quality silver-grey Oxford nylon fabric Bottom and ends made from hard-wearing rubber coated nylon Interior insulation lining of aluminium coated polyester Sturdy zips for easy fitment
Weight	1.5 to 2 kg

Phone pocket next to CFX USB output

Direct access to controls

Practical pockets

Product	Ref. No.
WAECO CFX-35 Insulated protective cover	CFX-IC35
WAECO CFX-40 Insulated protective cover	CFX-IC40
WAECO CFX-50 Insulated protective cover	CFX-IC50
WAECO CFX-65 Insulated protective cover	CFX-IC65

WAECO Insulated protective covers

For CF-18, CF-25, CF-80, CF-110, CDF-35 & CDF-45

CB-CF18

CB-CF25



CB-CF80

CB-CF110

CB-CDF35

Material, Outside	High-quality silver-grey Oxford nylon, lid and base in robust, rubber coated, black nylon
Material, inside	Aluminium coated polyester
Colour, sides	Silver grey
Colour, lid and base	Black
Quality features	Detachable lid and base, outside pockets to store small items, four fixing rings to secure the box safely in the vehicle

Product	Ref. No.
CoolFreeze CB-CF18	AC-CB-CF18
CoolFreeze CB-CF25	AC-CB-CF25
CoolFreeze CB-CF80	AC-CB-CF80
CoolFreeze CB-CF110	AC-CB-CF110
CoolFreeze CB-CDF35	AC-CB-CDF35

Contents, specifications and availability are subject to change due to technical improvement. Dometic GROUP accepts no liability for errors and printing mistakes.

WAECO *CFX* IN-VEHICLE INSTALLATION SOLUTIONS

If you are travelling on corrugated roads, having your fridge restrained with a fixing kit is a safe option and helps the fridge travel with the suspension of the vehicle.

The accessories range also features fridge slides, for more convenient access to the fridge in your vehicle.

WAECO *CFX* Fixing kit

Suits all *CFX*
(Also suits CF-35, CF-40, CF-50, CF-50DZ, CF-60, CF-80 & CF-110)

Weight	0.8 kg
Quality features	4-point fixing for reliable restraint Low profile tie-down anchor points. Strong metal D-ring folds down when not in use Fixing hardware includes nylon insert shake proof nuts. Heavy duty straps Quick release buckles

Product	Ref. No.
WAECO CFX Fixing kit	CFX-UFK

WAECO *CFX* Fridge slides

CFX-SLD 35/40 - Suits: *CFX-35* & *CFX-40* (Also suits CF-35, CF-40, CF-50, CF-50DZ & CF-60)

CFX-SLD 50/65 - Suits: *CFX-50*, *CFX-65* & *CFX-65DZ*

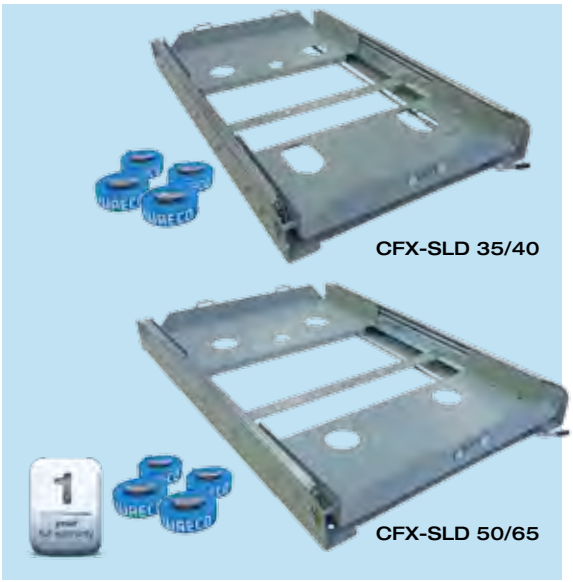

	CFX-SLD-35/40	CFX-SLD-50/65
Material / Colour	Powder coated metal / grey	
Weight	16.5 kg	17 kg
Dimensions	Internal: **W**401 x **D**740 mm External: **W**459 x **H**79 x **D**760* mm * Extended: **D**1420 mm	**W**458 x **D**740 mm **W**516 x **H**79 x **D**760* mm **D**1420 mm
Quality features	100 kg max. load capability 4 x heavy duty straps, 4 x quick release buckles, 4 x M6 x 16 screws & washers are included in the set Two sets of mounting holes: 1: To suit feet in base of *CFX* (CFX-SLD-35/40 also fits CF-35/40/50/50DZ/60) for quick fitment 2: To match M6 thread nutserts in base of *CFX* for semi-permanent installation	

Product	Ref. No.
WAECO CFX Fridge slide 35/40	CFX-SLD3540
WAECO CFX Fridge slide 50/65	CFX-SLD5065

WAECO Fridge slide for CF-80, CF-80DZ & CF-110

For fastening of WAECO CoolFreeze coolers in vehicles and for convenient loading and unloading.

Material / Colour	Powder coated metal / grey
Weight	19.4 kg
Dimensions	SLD-110 Internal: **W**520 x **D**888 mm External: **W**581 x **H**79 x **D**910* mm * Extended: **D**1660 mm
Quality features	100 kg max. load capability, tie-down straps included in the set

Product	Ref. No.
Fridge slide for CF-110/80	AC-SLD-110

WAECO *CFX* Wireless display

Wireless display

The wireless display shows the internal temperature of the fridge from a distance. It also shows the voltage protection level set, and has adjustable alarm limits that enable an audible warning if the temperature rises or the battery gets low.

Suits all ***CFX*** models

Product	Ref. No.
WAECO CFX Wireless display	CFX-WD

Dimensions	**W**66 x **H**85 x **D**23 mm
Weight	0.1 kg
Quality features	Wireless operation (2.4GHz) - range up to 15 m Displays: - fridge temperature - fridge power source - battery protection setting - alarm setting Temperature alarm setting - 2 levels, audible & visual alarm Backlit display (when 12/24 V DC connected) Dual power source: AAA batteries (included) 1.8 m lead/cigarette & plug 12/24 volt

WAECO CoolFreeze Fridge stand

Portable fridge stand

- Strong aluminium frame.
- Folds up easily and compact.
- 2 height positions:
  H450 x **D**330 mm &
  H310 x **D**450 mm (± 20 mm).
- One adjustable foot.
- Supports up to 80 kg.
- Comes with storage bag.

SUITS ALL COOLFREEZE CF & CFX RANGE

Product	Ref. No.
CoolFreeze Fridge Stand	AC-FridgeStand

WAECO Universal fixing kit

For fastening of CDF-35 / CF-25 / CF-35 / CF-40 / CF-50 / CF-60 / CF-50DZ in vehicles.

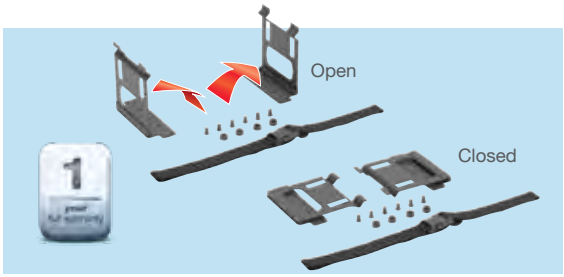

Material	Powder coated metal
Colour	Black
Scope of delivery	Two frame sections, adjustable strap with snap lock, set of screws

Product	Ref. No.
Universal fixing kit for CDF-35 / 45, CF-25 / 35 / 40 / 50 / 60 / 50DZ	AC-UFK

WAECO CoolPower RAPS12R-U2

12 volt fridge power wiring kit - heavy duty to suit all WAECO compressor fridge/freezers

Product	Ref. No.
CoolPower RAPS12R-U2	RAPS12R-U2

Highly recommended for replacement of standard vehicle cigarette lighter sockets which are often inadequate to properly run fridges due to thin wiring and associated voltage drops.

One kit does all. This truly universal unit is packed with the following features:

- Compact design for internal mounting in the rear of vehicle.
- 6 metres of heavy duty 6 mm cable.
- Switchable between constant power for running portable fridge and on/off with engine for battery charging.
- Even in “constant power” mode, cuts out at very low vehicle battery voltage to protect the battery.
- Choice of socket-heavy duty hella style and cigarette type both built in.
- Fuse and installation kit with snap action mounting plate included.

Contents, specifications and availability are subject to change due to technical improvement. Dometic GROUP accepts no liability for errors and printing mistakes.

WAECO CoolPower RAPS36

WAECO battery pack for compressor fridge/freezers

- Heavy duty 12 volt remote power.
- Dimensions: **W**230 x **H**245 x **D**227 mm.
- Weight: 13.6 kg
- Genuine deep-cycle AGM battery cells.
- Cigarette and hella output sockets.
- Digital volts display.
- Battery condition LED's/test button.
- Secure screw connection charging socket.
- 1.5 m charging lead.
- 36 amp hours.
- Maximum charging current: 14.4 A
- Built-in charging posts for charging via optional 240 volts to DC charger.

Suitable for solar operation

Product	Ref. No.
CoolPower RAPS36	RAPS36

WAECO CoolPower RAPS72 KIT

Cradle for two battery packs

* Kit only, batteries not included.

Get twice the convenience of remote battery power with the RAPS 72 KIT. Combines two CoolPower 36 batteries to provide a generous 72 amp hours of power for those longer stays. Ideal for your CF-80 or CF-110 fridge.

- Sturdy powder coated steel cradle.
- Positive location lugs.
- Connection lead.

Product	Ref. No.
CoolPower RAP72 KIT	RAPS72KIT

WAECO Solar Power

PORTABLE SOLAR

WAECO solar panels are an alternative power source you can use to charge your batteries. They have an inbuilt 10 amp heavy duty voltage regulator. They have adjustable feet so that you can direct them to towards the sun throughout the day and come in 80 and 120 watt sizes.

WAECO Portable solar PS80 and PS120

Portable folding solar panel kit - 12 volt, PS80: 80 watt, PS120: 120 watt

- High performance monocrystalline silicon.
- 12 volt, 10 amp heavy duty regulator.
- Battery temperature sensor.
- 5 m lead with alligator clips and anderson plug connector.
- Adjustable feet - for optimum angle to the sun.
- Folds up easily and compact.
- Comes with protective carry bag.

	PS80	PS120
Dimensions	Folded - **W**534 x **H**610 x **D**70 mm	Folded - **W**534 x **H**810 x **D**70 mm
Weight	10 kg (Inc. cables and carry bag)	14 kg (Inc. cables and carry bag)
Max power output.	4.60 amps	6.90 amps

Product	Ref. No.
Portable solar PS80	PS80
Portable solar PS120	PS120

WAECO Cool-Ice

ROTOMOULDED ICEBOXES

WAECO Cool-Ice iceboxes will keep your ice frozen for days and are perfect for the BBQ, the picnic, around the pool or even at the camping trip. WAECO Cool-Ice iceboxes hold large amounts of ice and frozen goods for long periods and are ideal for continuous exposure to weather, especially on boats. Also for use in trucks, camping areas, BBQs, poolside, sports games and outdoor parties.

- Designed for optimal performance / weight / volume balance.
- Strong, ergonomic polyethylene handles (WCI-42 and up).
- Integrated polyethylene feet & large diameter drain plug.
- Thick polyurethane refrigeration grade foam insulation.
- Strong nylon latches with stainless steel fixing screws.
- Fully integrated hinges with stainless steel rods.
- Strong, seamless, UV stabilised/food grade polyethylene CFC free construction.
- Lightweight, hygienic & easy to clean.
- Extremely low heat absorption.
- Integrated tie-down points.
- Largest service network and 5 year warranty Australia wide.

Labyrinth seal design

Food quality gasket recessed into a channel in the lid. When the lid is closed the adjacent dike in the lid combined with the raised tongue on the box collar creates a highly efficient labyrinth seal against external ambient hot air.

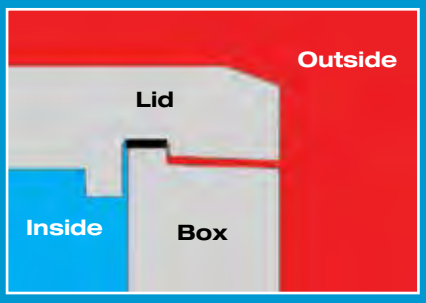

KEEP ICE FOR UP TO 10 DAYS *

Model	Capacity (litres)	Dimensions	Weight (kg)
WCI-13	13	**W**388 x **H**305 x **D**245 mm	2.8
WCI-22	22	**W**388 x **H**313 x **D**365 mm	4.2
WCI-42	41	**W**635 x **H**337 x **D**390 mm	7.5
WCI-55	55	**W**565 x **H**420 x **D**485 mm	9.3
WCI-70	68	**W**685 x **H**420 x **D**485 mm	10.4
WCI-85	86	**W**835 x **H**435 x **D**495 mm	13.1
WCI-85W	86	**W**835 x **H**435 x **D**495 mm	13.5
WCI-110	111	**W**1050 x **H**440 x **D**510 mm	15.7

* Ice will last from 3 to 10 days depending on usage and conditions. Visit www.waeco.com.au for further details.

Contents, specifications and availability are subject to change due to technical improvement. Dometic GROUP accepts no liability for errors and printing mistakes.

WAECO CoolFun & BordBar thermoelectric coolers

LOW-COST, LIGHT-WEIGHT, VERSATILE

Thanks to their low weight, thermoelectric coolers are particularly easy to carry and transport. Their cooling capacity of up to 20 °C below the ambient temperature is sufficient for most purposes, including car journeys, camping or picnics.

Thermoelectrics offer an added bonus: most of the coolers equipped with this wear and maintenance free technology can be used for both cooling and heating (excludes S32). Cost-efficient and reliable, thermoelectric energy is “just right” for small and medium-size portable coolers.

WAECO CoolFun S32

Product	Ref. No.
CoolFun S32 DC/AC	S32 DC/AC

Thermoelectric cooler bag with carry strap

Gross capacity	32 litres
Power source	12 volts DC and 240* volts AC
Weight	2.9 kg
Dimensions	**W**370 x **H**400 x **D**280 mm
Cooling capacity	Up to 15 °C below ambient

* Mains adapter included

Up to 15 °C below ambient temperature

WAECO CoolFun W35

Product	Ref. No.
CoolFun W35	W35 DC/AC

Thermoelectric cooler/warmer with wheels

Gross capacity	35 litres
Power source	12 volts DC and 240 volts AC
Weight	8.8 kg
Dimensions	**W**560 x **H**458 x **D**373 mm
Cooling capacity	Up to 20 °C below ambient
Warming capacity	Up to 65 °C

Up to 20 °C below ambient temperature

Up to 65°C in heating mode

WAECO BordBar TB-08G

Product	Ref. No.
BordBar TB-08G	TB-08G

Thermoelectric cooler/warmer with carry strap

Gross capacity	Approx. 8 litres
Power source	12 volts
Weight	Approx. 3.2 kg
Dimensions	**W**200 x **H**298 x **D**442 mm
Cooling capacity	Up to 20 °C below ambient
Warming capacity	Up to 55 °C

Up to 20 °C below ambient temperature

Up to 55°C in heating mode

WAECO BordBar TB-15G

Product	Ref. No.
BordBar TB-15G	TB-15G

Thermoelectric car cooler/warmer

Gross capacity	Approx. 15 litres
Power source	12 volts
Weight	Approx. 5.2 kg
Dimensions	**W**282 x **H**328 x **D**462 mm
Cooling capacity	Up to 20 °C below ambient
Warming capacity	Up to 65 °C

Up to 20 °C below ambient temperature

Up to 65°C in heating mode

WAECO CoolPro thermoelectric coolers

HIGH-TECH COOLERS WITH DC/AC AND SPECIAL ELECTRONICS

Mobility, performance and convenience – these are the hallmarks of the WAECO CoolPro series. State-of-the-art thermoelectrics make for outstanding cooling results up to 30 °C below the ambient temperature. Add to this all the useful features and functions: 12/24/240 volts DC/AC as standard, individual temperature regulation with LED display and memory function, to name but a few. At the touch of a button the coolers (+1 °C to +15 °C) can be turned into warmer boxes (+50 °C to +65 °C). WAECO CoolPro – the comfort class of thermoelectric refrigeration.

PERFECT DOWN TO THE LAST DETAIL – PRODUCT BENEFITS OF THE COOLPRO SERIES

- **Highly effective insulation.** Outstanding energy efficiency
- **Dynamic interior ventilation.** Significantly improved cooling performance
- **Wear-free fans.** Long service life
- **Intelligent power-save circuit.** Electronics switch automatically to power-save mode once the desired interior temperature has been reached

- **12/24/240 volts as standard.** With priority circuit for 240 volts
- **Heat exchanger and high-performance Peltier element.** Cooling performance up to 30 °C below ambient temperature!
- **Magnetic switch.** Switches the interior fan off when you open the cooler
- **Universal fixing kit.** (optional) (For TC-14FL and TC-21FL)

WAECO CoolPro TC-14FL

Thermoelectric cooler/warmer with TC special electronics

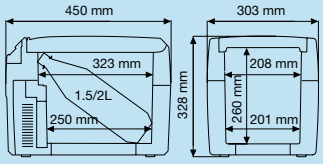

Product	Ref. No.
CoolPro TC-14FL	TC-14FL

Optional extras

Universal fixing kit	UFK-T
Low voltage protector	AC-M50K

Gross capacity	Approx. 14 litres
Voltage	12/24 volts DC and 240 volts AC
Power consumption	Approx. 55 watts at 12 volts DC Approx. 60 watts at 24 volts DC Approx. 80 watts at 240 volts AC
Average running time	30% at +20 °C ambient temperature
Temperature range	Cooling: +1 °C to +15 °C (up to 30 °C below ambient temperature); Heating: +50 °C to +65 °C
Insulation	Polyurethane full-foam insulation
System	Wear-free thermoelectrics (Peltier system), cold transmission to the interior by dynamically ventilated aluminium heat exchanger, heat dissipation to the outside by high-performance heat exchanger and brushless, wear-free fan
Material	Sturdy injection moulded parts
Colour	Dark grey/pale grey
Weight	Approx. 5 kg
Quality features	TC special electronics: 7-stage electronic thermostat with LED indicators, memory function, ON/OFF and cold/warm option activated with soft-touch operating panel, intelligent power-save circuit. Integrated mains supply unit with priority circuit, outstanding cooling performance, magnetic switch to deactivate the interior fan when the box is opened, detachable lid with magnetic closure, sturdy, fold-away handle
Test marks	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)

WAECO CoolPro TC-21FL

Thermoelectric cooler/warmer with TC special electronics

Product	Ref. No.
CoolPro TC-21FL	TC-21FL
Optional extras	
Universal fixing kit	UFK-T
Low voltage protector	AC-M50K

Gross capacity	Approx. 21 litres
Voltage	12/24 volts DC and 240 volts AC
Power consumption	Approx. 55 watts at 12 volts DC Approx. 60 watts at 24 volts DC Approx. 80 watts at 240 volts AC
Average running time	32% at +20 °C ambient temperature
Temperature range	Cooling: +1 °C to +15 °C (up to 30 °C below ambient temperature); Heating: +50 °C to +65 °C
Insulation	Polyurethane full-foam insulation
System	Wear-free thermoelectrics (Peltier system), cold transmission to the interior by dynamically ventilated aluminium heat exchanger, heat dissipation to the outside by high-performance heat exchanger and brushless, wear-free fan
Material	Sturdy injection moulded parts
Colour	Dark grey/pale grey
Weight	Approx. 6 kg
Quality features	TC special electronics: 7-stage electronic thermostat with LED indicators, memory function, ON/OFF and cold/warm option activated with soft-touch operating panel, intelligent power-save circuit. Integrated mains supply unit with priority circuit, outstanding cooling performance, magnetic switch to deactivate the interior fan when the box is opened, detachable lid with snap lock closure, handy carrying grips, vertical space for 2-litre bottles, adjustable grid divider
Test marks	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)

WAECO CoolPro TC-35FL

Thermoelectric cooler/warmer with TC special electronics

Product	Ref. No.
CoolPro TC-35FL	TC-35FL
Optional extras	
Low voltage protector	AC-M50K

Gross capacity	Approx. 35 litres
Voltage	12/24 volts DC and 240 volts AC
Power consumption	Approx. 55 watts at 12 volts DC Approx. 60 watts at 24 volts DC Approx. 80 watts at 240 volts AC
Average running time	35% at +20 °C ambient temperature
Temperature range	Cooling: +1 °C to +15 °C (up to 30 °C below ambient temperature); Heating: +50 °C to +65 °C
Insulation	Polyurethane full-foam insulation
System	Wear-free thermoelectrics (Peltier system), cold transmission to the interior by dynamically ventilated aluminium heat exchanger, heat dissipation to the outside by high-performance heat exchanger and brushless, wear-free fan
Material	Sturdy injection moulded parts
Colour	Dark grey/pale grey
Weight	Approx. 10 kg
Quality features	TC special electronics: 7-stage electronic thermostat with LED indicators, memory function, ON/OFF and cold/warm option activated with soft-touch operating panel, intelligent power-save circuit. Integrated mains supply unit with priority circuit, outstanding cooling performance, magnetic switch to deactivate the interior fan when the box is opened, detachable lid with snap lock closure, handy carrying grips, vertical space for 2-litre bottles, adjustable grid divider
Test marks	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)

Contents, specifications and availability are subject to change due to technical improvement. Dometic GROUP accepts no liability for errors and printing mistakes.

Absorption coolers

COOLING WITH POWER AND LPG

Silent and truly mobile, absorption coolers give camping enthusiasts all the freedom they need. Gas operation in a remote field, convenient 240 volt hook-up at the campsite, power supply from the 12 volt socket in cars or motorhomes – anything is possible! Switch-over from one energy mode to another in a jiffy! Whether LPG, 12 or 240 volts, the refrigeration system adjusts to suit your needs – Cooler, fridge and freezer models available.

HOW ABSORPTION COOLING WORKS

A solution of ammonia and water are heated in the boiler causing the ammonia to be driven off as a vapour. The vapour is condensed to liquid and fed into the evaporator where it combines with hydrogen and evaporates, thereby digesting heat. The mixture of ammonia and hydrogen then passes through the absorber where the ammonia is absorbed back into the water. The re-combined water and ammonia is then returned to the boiler so the process can continue.

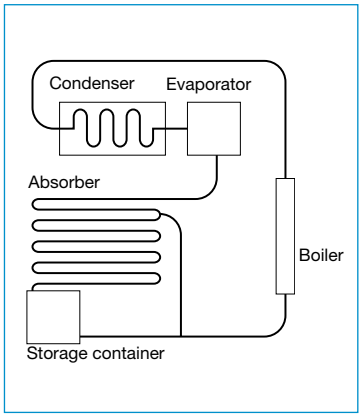

WAECO CooFun CA-35

Entry level absorption cooler for 12 volts, 240 volts and LPG

Gross capacity	Approx. 35 litres
Power source	240 volts AC/72 watt 12 volts DC/72 watt LPG/12g/h
Weight	19.5 kg
Dimensions	**W**520 x **H**454 x **D**515 mm
Colour	Silver/grey
Insulation	Solid CFC-free polyurethane foam

Product	Ref. No.
CoolFun CA-35	CA-35

LPG operation

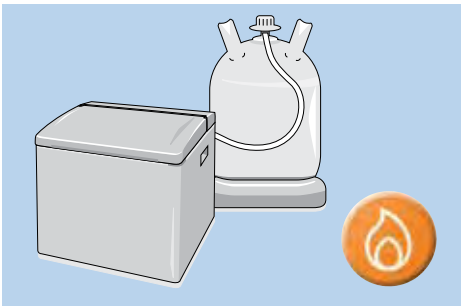

240-volt connection

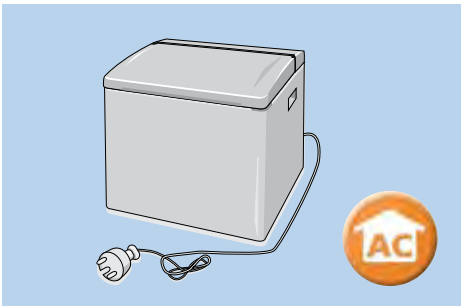

12-volt connection

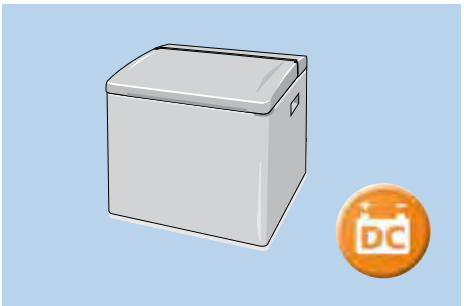

12/24 volts

Gas

Up to 25 °C below ambient temperature (CA-35 & RC 1600)

Fridge/Freezer (F400 & RC1180)

DOMETIC F400

Absorption fridge or freezer for 12 volts, 240 volts and LPG

Gross capacity	Approx. 39 litres fridge or freezer
Power source	240 volts AC/120 watt 12 volts DC/120 watt LPG/19 g/h
Weight	23 kg
Dimensions	**W**610 x **H**505 x **D**510 mm
Material	Tough rotomoulded cabinet
Colour	Green
Quality features	Piezo ignition, thermostat regulation in 240 volt and gas modes. Continuous running on 12 volt

Product	Ref. No.
Dometic F400	F400

DOMETIC RC1180

Absorption fridge and freezer for 12 volts, 240 volts and LPG

Gross capacity	Approx. 30 litres fridge, 16 litres freezer
Power source	240 volts AC/120 watt 12 volts DC/120 W, LPG/19 g/h
Weight	26 kg
Dimensions	**W**640 x **H**520 x **D**520 mm
Material	Tough rotomoulded cabinet
Colour	Blue
Quality features	Piezo ignition, thermostat regulation in 240 volt and gas modes. Continuous running on 12 volt

Removable divider – also operates as 50 litre fridge.

Product	Ref. No.
Dometic RC1180	RC1180

Contents, specifications and availability are subject to change due to technical improvement. Dometic GROUP accepts no liability for errors and printing mistakes.

WAECO Mobile energy systems

POWER SUPPLY TO VOLTAGE CONVERTERS

Enjoy your home comforts even when you are away. Offering 240 volt adapters for your DC only appliances, 12 volt inverters for use of your favourite 240 volt gadgets on the road and a handy dynamo-charged torch with tool kit included.

WAECO Mobile energy systems range includes everything you need for perfect power supply when you travel.

WAECO CoolPower EPS-817

240 volt adapter

240 volts mains connection, 12 volt 6 amp

Required for the connection of listed DC compressor driven fridge/ freezers. Suitable also for all other 12 volt thermoelectric coolers or as a universal power unit via the integrated cigarette lighter socket. Ideal for use at home, in the hotel, at the campsite, in the weekend home, etc.

Input voltage:	240 volts AC/50 Hz
Output voltage:	13 volts DC
Continuous load:	6 amps
Dimensions:	**W**115 x **H**65 x **D**170 mm
Weight:	0.6 kg

SUITS ALL THERMOELECTRIC COOLERS AND FOLLOWING COMPRESSOR MODELS:
CURRENT MODELS: CDF-11, CDF-35, CF-18, CF-25, CD-30, CU-80 SERIES
OLD MODELS: CF-35DC to CF-60DC, CDF-45

Product	Ref. No.
CoolPower EPS-817	AC-EPS-817A

WAECO CoolPower MPS-50

240 volt adapter

For problem free connection to 110 to 240 volt mains systems. Suitable for all WAECO compressor models.

Input voltage:	110 to 240 volts AC
Output voltage:	27 volts DC
Continuous load:	6 amps
Output power:	150 watts
Dimensions:	**W**120 x **H**70 x **D**200 mm
Weight:	Approx. 1 kg
Battery voltage:	12/24 volts DC
Quality features:	Switch mode, automatic priority for mains operation

Product	Ref. No.
CoolPower MPS-50	MPS-50A

Contents, specifications and availability are subject to change due to technical improvement. Dometic GROUP accepts no liability for errors and printing mistakes.

WAECO PerfectPower MCI-150-12

12 volts to 240 volts inverter

Product	Ref. No.
PerfectPower CanSize Inverter	MCI-150-12

Quality features

Firm and secure hold in the drinks can holder
• Mobile energy for 240 volt low-power consumers
• USB output as standard • Light-weight, round and super-compact • Thermal overload protection, electronic short circuit protection, automatic low voltage shutdown.

NOW WITH USB

Input voltage	12 volts DC (10 to 15 volts)
Output voltage	240 volts AC
Curve	modified sine wave
Output frequency	50 ± 2 Hz
Full load current input	15 amps
Peak/continuous power	250/150 watts
Maximum ambient temperature	50 °C ± 5 °C
Weight	490 g
Dimensions	**Ø**66 x **L**173 mm

WAECO PerfectPower PP152 / PP402 / PP602

Modified sine wave inverters turn 12 volt battery voltage into 240 volt AC.

PP152 PP402 PP602

Product	Ref. No.
PerfectPower PP 152 150W	PP152
PerfectPower PP 402 350W	PP402
PerfectPower PP 602 550W	PP602

^ **W**129 with foot mounts

Quality features

• Surge and short-circuit-proof. • Reverse polarity protection by means of replaceable fuse. • Can be activated/deactivated using external switch.
• Individually adjustable clip on mounts. • Surge and short circuit proof, high and low voltage shutdown, reverse polarity protection fuse, can be activated/deactivated using external switch.
• PP 152 with cigarette lighter plug.

	PP152	PP402	PP602
Input voltage	12 volt DC (10 - 15 volt)		
Output voltage/curve	210 – 240 volt AC/modified sine wave		
Output frequency	50 Hz		
Input current at no load	< 0.25 amp		
Efficiency	up to 90%		
Continuous power	150 watts	350 watts	550 watts
Peak power	350 watts	700 watts	1100 watts
Dimensions (W x H x D)	^101 x 71 x 171 mm	^101 x 71 x 192 mm	^101 x 71 x 223 mm
Weight	0.84 kg	0.99 kg	1.4 kg

WAECO PocketPower torch MDT-100

A dynamo-charged torch with LED light and a long lasting lithium battery. The on-board dynamo crank handle lets you charge the battery. So you don't need any other power source. Select the amount of light you need, either 1 LED or all 3.

As an added bonus there is a 6-tool kit cartridge for those little emergency repair jobs and a universal mobile phone charger plug (adaptor not included). A truly mobile solution.

Product	Ref. No.
PocketPower Torch	MDT-100

Battery	3.6 V, 80mA lithium
Charging time/battery life:	120 turns/1LED light approx. 120 min.
	120 turns/3LED light approx. 40 min.
	360 turns/1LED light approx. 230 min.
	360 turns/3LED light approx. 100 min.
Dimensions	**W**55 x **L**150 mm
Weight	228 g

DOMETIC Sanitation

HOME LIKE COMFORT

Small, but a big performer! Handy and space saving, the 970 series adds hygienic comfort to your recreational vehicle or when enjoying the outdoors. Many sensible functions are contained in the smallest possible space to ensure you can enjoy home like comfort when travelling.

DOMETIC 970 series

Space saving portable toilets with 360° pressurised flush.

DOMETIC 972

	SANIPOTTIE 972
Flush water tank capacity	8.7 litres
Waste tank capacity	9.8 litres
Material	ABS
Colour	White / grey
Dimensions	**W**342 x **H**312 x **D**390 mm
Weight	5.4 kg

Product	**Ref. No**
DOMETIC 972	301097206

DOMETIC 976

	SANIPOTTIE 976
Flush water tank capacity	8.7 litres
Waste tank capacity	18.9 litres
Material	ABS
Colour	White / grey
Dimensions	**W**342 x **H**385 x **D**390 mm
Weight	5.9 kg

Product	**Ref. No**
DOMETIC 976	301097606

Fixing kit

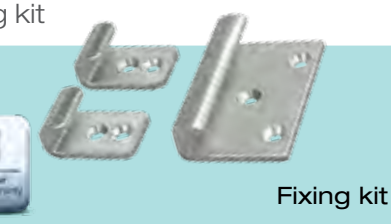

Fixing kit

For easy and safe installation

Product	**Ref. No**
Fixing kit for 970 series	385320005

→ **Build up air pressure**

→ **Pull out handle**

→ **Push once**

→ **Convenient discharge**

Contents, specifications and availability are subject to change due to technical improvement. Dometic GROUP accepts no liability for errors and printing mistakes.

The unique DOMETIC Care hygiene system

FOR YOUR MOBILE TOILET

The **Dometic Care** product range is synonymous with cleanliness in every micro pore and the result of innovative research. Perfectly compatible products for the removal of stains and toilet odours – as effective as necessary, as gentle on the environment as possible and completely user friendly in the process.

DOMETIC ExtraCare

Fluid additive for the flush water tank. - Can be used on its own or in combination with other Dometic sanitation products.

- Cleans and protects.
- Protects the rubber seals.
- Creates a smoother flush.
- Prevents stains and scaling.
- Reduces the build-up of scale.
- Integrated deodoriser adds a pleasant fragrance.
- Micro-thin protective layer facilitates cleaning of the toilet bowl.

Product	Ref. No
DOMETIC ExtraCare, 1.5 litre	9107200001

DOMETIC PowerCare

Highly effective fluid additive for the waste holding tanks. - Breaks down waste into liquid and prevents unpleasant odours.

- Indispensable for winter campers.
- Simple dosing with measuring strip.
- Remains effective after freezing and thawing.
- Breaks down waste into liquid to facilitate disposal.
- Prevents the emergence of gas and unpleasant odours in the holding tank.

Product	Ref. No
DOMETIC PowerCare, 1.5 litre	9107200002

DOMETIC SpecialCare

Ecologically compatible fluid additive for the waste holding tanks. - Waste can be disposed at almost every campsite.

- Pleasant, fresh scent.
- Outstanding odour protection.
- Facilitates waste storage and discharge.
- Remains effective after freezing and thawing.
- Eco-friendly – awarded with ecological hallmark.

Product	Ref. No
DOMETIC SpecialCare, 1.5 litre	9107200003

WAECO PowerVac PV-100

The handy vacuum cleaner comes complete with integrated battery – no need for an external power supply. It is strong enough to get rid of the most ground in dirt. Even liquids are no problem for the combined wet-and-dry cleaner. It doesn't require much room for storage. Small and compact, the handy gadget slots in to the boot or vehicle interior, the garage or the storeroom.

Scope of delivery:
Vacuum cleaner, hose, attachments for upholstery, rugs and narrow gaps, carrying strap, mains adapter, 12 volt charging cable, operating instructions.

Features & functions

- Handy, battery-powered vacuum cleaner for mobile use in cars, motorhomes, caravans, boats and home.
- Maximum mobility with rechargeable 12 volt battery.
- Can be recharged from 12 and 240 volts.
- Easy to clean dust container and fabric filter.
- Cleaning power: 400 mm water column.

Motor	12 volts DC, 28,000 rpm
Battery	12 volts DC, 2.6 Ah
Operating time	Approx. 18 min ± 10%
Charging time	10 to 14 h (automatic cut-off)
Capacity	3.8 litres
Power consumption	Approx. 90 watts
Cleaning power	Approx. 400 mm water column (± 10%)
Operating temperature	0 °C to +40 °C
Material	Handle: ABS Filter: polyester Dust container: PP
Dimensions	**W**270 x **H**320 x **D**198 mm
Weight	2.15 kg

Product	Ref. No.
PowerVac	PV-100

WAECO PerfectKitchen MCK-750

If something hot is what you need; this handy kettle, especially designed for operation in vehicles, provides you with a pot of tea, a cup of coffee or a mug of soup in no time at all. This robust gadget suits 12 volt operation. The automatic cut-off function stops it from overheating when empty and ensures safe and comfortable handling. An indispensable helper on board!

Quality features
Robust relay technology, switches off automatically when the boiling temperature has been reached or when there's no water in the kettle, status indication

Capacity approx.	0.75 litres
Voltage	12 volts DC
Average power consumption	12 volts: 200 watts
Colour	Black/silver
Dimensions	**W**190 x **H**205 x **D**125 mm (incl. fixing kit)
Weight	0.8 kg
Test marks	e-approved (Automotive EMC Directive), complies with German Foodstuff and Consumer Goods Act (LMBG)
Scope of delivery	Fixing kit for wall or desk mounting

Product	Ref. No.
PerfectKitchen MCK-750, 12 volts	MCK-750-12/N

Contents, specifications and availability are subject to change due to technical improvement. Dometic GROUP accepts no liability for errors and printing mistakes.

DOMETIC Vacuum sealer

The new lightweight, low profile Dometic Vacuum sealer keeps food fresh up to five times longer than refrigeration alone. It runs on both 12V DC and 240V AC power, ideal for home or on the road.

- 12/240 volt
- Keeps food fresh up to 5 times longer*
- Locks in flavour, colour and nutrition
- Eliminate freezer burn & wasted food
- For outdoor and indoor use
- Maximise fridge & freezer space
- Manual and automatic vacuum sealing
- **W**380 x **H**83 x **D**152 mm

NEW 12/240 VOLT

* Various factors, including freshness of food prior to vacuum sealing, traces of contaminates, storage temperature and humidity may affect the storage life of food.

Product	Ref. No.
Vacuum sealer	VS-AC/DC

DOMETIC Vacuum sealer rolls

- Available in 8” and 11”
- 2 rolls x 3 m each (box of 6)
- BPA Free and food grade quality
- Fridge, freezer, microwave and simmer safe
- Maintains freshness and nutritional benefits

Product	Ref. No.
8” Vacuum sealer rolls	VS-8ROLL
11” Vacuum sealer rolls	VS-11ROLL

DOMETIC ORIGO 5100

This all rounder is not only an effective source of heat but also an excellent stove for cooking. Great for the caravan, boat or camping.

Burning time	Approx 6 to 8 hours
Number of burners	1
Burner capacity	1500 watts
Boiling time	10 minutes for 1 litre of water
Tank capacity	1.2 litres
Dimensions	**Ø**285 x **H**285 mm
Weight	3 kg

Product	Ref. No.
Dometic ORIGO 5100	OH5100

TRUMA LevelCheck

The practical LevelCheck uses LEDs for quick and reliable indication of whether there is liquid gas in the measured area. The measuring device is simply placed against the gas cylinder in a horizontal position.

Dimensions	**W**135 x **H**35 x **D**30 mm
Weight	approx. 100 g (incl. battery)
Power supply	9 volt battery

Product	Ref. No.
Truma LevelCheck	50500-02

MILENCO

EUROPE'S LEADING MANUFACTURER OF AWARD WINNING CARAVAN PRODUCTS

Milenco produce a range of quality products specially designed for the caravanning market. Milenco mirrors have been designed to offer superior vision and a vibration free view. Milenco Levels are available in 4 different sizes and ideal for soft ground. The Milenco level indicator is designed for fast easy levelling and the new Milenco ball weight gauge gives you a precise ball weight even after 1000 uses.

MILENCO AERO EXTRA WIDE MIRRORS

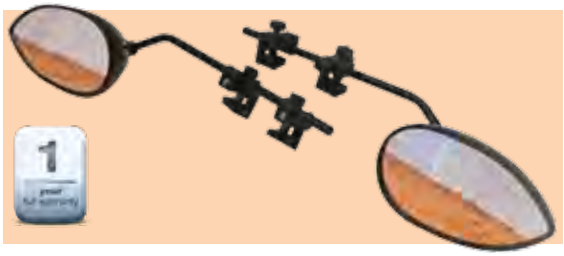

The mirror head design (registered design) utilises airflow around your car to stabilise and balance the mirror head at speed. This mirror has been extensively tested at speeds up to 250 km/h (155 m/ph), to ensure that you get the best vision possible. This design also offers superior performance in high winds and the effect of passing large commercial vehicles has been minimised.

Product	Ref. No.
MILENCO MIRROR AERO WIDE PAIR	M-2899

MILENCO GRAND AERO EXTRA WIDE MIRRORS

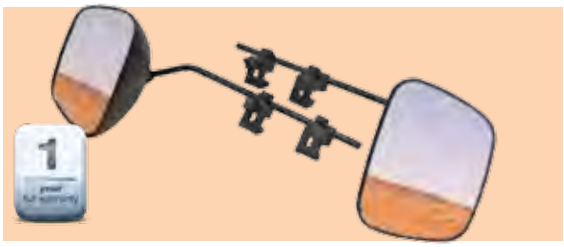

The Grand Aero Mirror offers all the benefits of the original Aero mirror, plus the maximum view possible, combined with very high stability.

The head is the largest ever used on a caravan towing mirror and has been specifically designed to be extremely stable. The shape enables you to see far past your caravan and cars in all three lanes on the highway.

Product	Ref. No.
MILENCO MIRROR GRAND AERO PAIR	M-2912

MILENCO TRIPLE LEVEL

This is the tallest (160 mm) 3 step level ever made. The level incorporates lattice, high-grip upper tread surface. They pocket the wheel at every height eliminating the need for chocks. They also have a solid base to stop sinking on soft ground.

Capacity: 2000 kg per wheel.

Product	Ref. No.
MILENCO LEVEL TRIPLE PAIR	M-2936

MILENCO QUATTRO LEVEL

We are very proud of the light weight innovative (patent pending) registered design. This gets over all of the problems using conventional levels on soft ground, but more importantly, it's twice as high as conventional plastic levels, which are never quite high enough.

Capacity: 2000 kg per wheel.

Product	Ref. No.
MILENCO LEVEL QUATTRO PAIR	M-2615

Contents, specifications and availability are subject to change due to technical improvement. Dometic GROUP accepts no liability for errors and printing mistakes.

MILENCO T1 MINI LEVEL

The Milenco T1 levels are lightweight with an intelligent design, featuring 50% base surface area and 50% top surface area. The Milenco levels are ideal to use on softer grounds or sand. Extra wide and heavy duty, the Milenco levels incorporate a lattice and a high-grip upper tread surface, pocketing the wheel at every height.

Capacity: 1250 kg per wheel.

Product	Ref. No.
MILENCO MINI LEVEL T1 PAIR	M-3896

MILENCO T2 MIDI LEVEL

The Milenco T2 levels are lightweight with an intelligent design, featuring 50% base surface area and 50% top surface area. The Milenco levels are ideal to use on softer grounds or sand. Extra wide and heavy duty, the Milenco levels incorporate a lattice and a high-grip upper tread surface, pocketing the wheel at every height.

Capacity: 1250 kg per wheel.

Product	Ref. No.
MILENCO MIDI LEVEL T2 PAIR	M-3902

MILENCO LEVEL INDICATOR GAUGE

Level indicator for Quattro and Triple levels. Use this clever gauge for fast and easy levelling. Simply place on the caravan floor to instantly see which step to use on your Milenco Triple or Quattro level for instant levelling.

Product	Ref. No.
MILENCO LEVEL INDICATOR GAUGE	M-3117

MILENCO BALL WEIGHT GAUGE

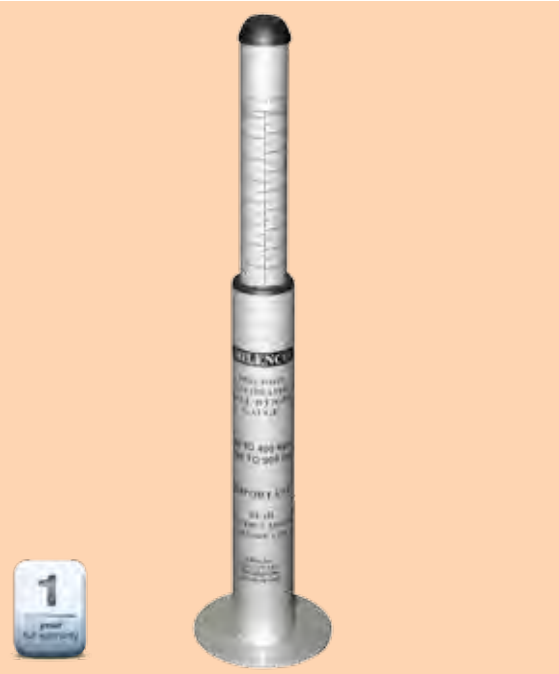

Milenco Precision calibrated ball weight gauge has been manufactured using unique materials so its calibration remains accurate even after 1000 uses. The scale goes up to 400 kg enabling you to have a reliable and accurate reading, helping to ensure you travel safely.

Ideal for calculating the ball weight on:

- → Single and twin axel caravans
- → Camper trailers
- → Off road camper vans/trailers
- → Trailers
- → Horse floats
- → Boat trailers

Product	Ref. No.
MILENCO 400 KG NOSE WEIGHT GAUGE	M-3155

WAECO Spares

12 volt cable
CFX-35/40/50/65/65DZ &
CF-25/35/40/50/50DZ/60

80-T2-2000AG

12 volt cable
CF-18 only

80-T2-2000AI

12 volt cable
Suits CF-80/80DZ/110

80-T2-1500AG1

240 volt cable
Suits CFX & CF range

38-AU-2000B4

Hinge assembly
Suits CF-80/80DZ/110

028LOCKASA

Latch assembly
Suits CF-80/80DZ/110

028-HINGEASA

Lid lanyard
Suits CF-50/50DZ/60

005NYLONA'SA

Lid lanyard
Suits CF-80/80DZ/110

028NYLONA'SA

Light assembly
For CF-35 & CF-40 only

80-01026LGT

Light assembly
All CF models except
for CF-35 & CF-40

81-01980LGT

Charge cable
RAPS36 charge cable

80-T2-1500JL

12 volt cable
For thermoelectric models

80-T1-2800AA

240 volts cable
For thermoelectric models

38-AU-2000B1

Latch bungee
WCI Icebox, pair

WCI-2001

Latch front
WCI Icebox, pair

WCI-2002

Bung
With gasket, WCI Icebox

WCI-1007

Contents, specifications and availability are subject to change due to technical improvement. Dometic GROUP accepts no liability for errors and printing mistakes.

NOTES

You can download our product brochures in PDF format by visiting the catalogues tab on our website

www.waeco.com.au/catalogues.asp

Dometic

Dometic is a customer-driven, world-leading provider of leisure products for the RV, automotive, truck and marine markets. We supply the industry and aftermarket with a complete range of air conditioners, refrigerators, awnings, cookers, sanitation systems, lighting, mobile power equipment, comfort and safety solutions, windows, doors and other equipment that make life more comfortable away from home.

Dometic supplies a wide range of workshop equipment for service and maintenance of built-in air conditioners. Dometic also provides specially designed refrigerators for hotel rooms, offices, wine storage and transport and storage of medical products. Our products are sold in almost 100 countries and are produced mainly in wholly-owned production facilities around the world.

AUSTRALIA

Dometic Australia, Queensland 1
1 John Duncan Court
Varsity Lakes QLD 4227
Phone: +61 (0)7 5507 6000
Fax: +61 (0)7 5507 6001
E-mail: sales@waeco.com.au
Web: www.waeco.com.au

Dometic Australia, Queensland 2
2/129 South Pine Road
Brendale QLD 4500
Phone: +61 (0)7 3205 7599
Fax: +61 (0)7 3881 1409
E-mail: sales@waeco.com.au
Web: www.waeco.com.au

Dometic Australia, Victoria
Bldg 3B, Clayton Business Park
1508 Centre Road, Clayton VIC 3168
Phone: +61 (0)3 9239 1000
Fax: +61 (0)3 9239 1099
E-mail: sales@waeco.com.au
Web: www.waeco.com.au

Dometic Australia, Western Australia
12 Prosperity Avenue
Wangara WA 6065
Phone: +61 (0)8 9303 3555
Fax: +61 (0)8 9303 3577
E-mail: sales@waeco.com.au
Web: www.waeco.com.au

Your retailer:

E & OE
Please Note: printing processes may not depict colour accurately. Dometic GROUP may introduce modifications to their products from time to time and consequently the details given in this leaflet are subject to alterations without notice.
Printed March 2014. 140211

Dometic

WAECO by Dometic GROUP